


Specifications 20AM Eng. 01-08-17

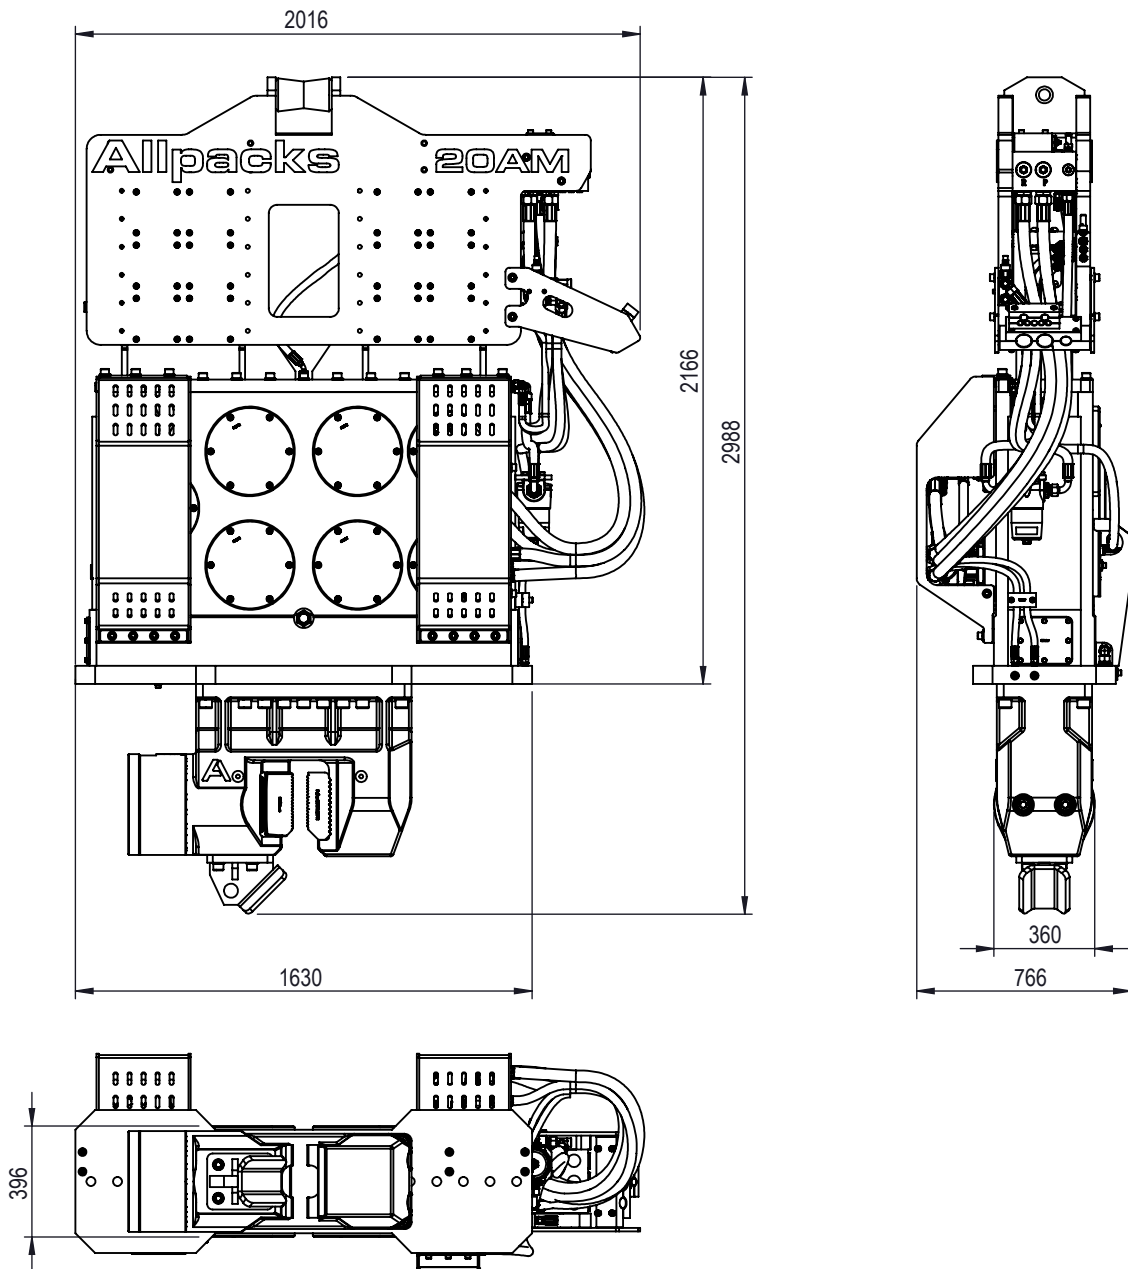

## Specifications

|                         |      |       |
|-------------------------|------|-------|
| Eccentric moment        | 0-20 | kgm   |
| Frequency               | 2200 | rpm   |
| Centrifugal force       | 1062 | kN    |
| Dynamic weight          | 3090 | kg    |
| Amplitude               | 12.9 | mm    |
| Amplitude incl. Clamp   | 9.5  | mm    |
| Max. Static line-pull   | 360  | kN    |
| Max. Operating pressure | 350  | bar   |
| Max. Oil Flow           | 607  | l/min |
| Total weight w.o. clamp | 5400 | kg    |

## Clamps

|                  |         |        |    |
|------------------|---------|--------|----|
| Universal Weight | 165UC   | 1100   | kg |
| Caisson Weight   | 2x 81CC | 2x 700 | kg |

## Powerpack

|             |       |      |    |
|-------------|-------|------|----|
| Type Weight | 600VH | 7800 | kg |
|-------------|-------|------|----|